



## DSL-200T说明书Instruction Manual



感谢您选购锐鹰公司的产品！

如欲了解更多相关产品的信息，请联系您当地的经销商或访问我们的网页。使用产品之前，请先仔细阅读说明书。

**Thank you for purchasing FalconEyes' products.**

**For further details of our related products, please contact your local distributor or visit our webpage at [www.falconeyes.com.hk](http://www.falconeyes.com.hk)**

**Thank you.**

**Please read this manual carefully before using this product.**

E-mail: [info@falconeyes.com.hk](mailto:info@falconeyes.com.hk)

Website: [www.falconeyes.com.hk](http://www.falconeyes.com.hk)



## D) 技术参数 Specifications:

型号 Model No.	DSL-200T
数量 No. of LED bulbs LED	1pcs X 200W
功率 Power	200W
色温 Color Temperature	5600K
流明 LUX (LUX)	5M(825)/ 3M(2150)/ 2M(4880)/ 1M(23000)/ 0.5M(155000)
电压 Voltage	AC-100V-240V
支撑座 Lamp Base	U架 U-bracket
尺寸 Dimesion(LxWxH)	425X190X160mm
照射角度 Beam Angle	35°
净重 Net Weight	2.09kg
配件 Accessories Included	标准罩 Reflector , 电源线 Power line

## E) 使用注意事项 Attention

- 1.请勿带电插拔：（不使用时应断开电源，即插入或拔出连接时应先 把电源开关关掉）
  - 2.非专业人士，请勿随便拆卸，否则后果自负。
  - 3.使用环境应保持干燥、通风注意防潮防水。
  - 4.产品表面有轻微的油渍及污渍请使用清洁布擦拭表面即可清除。
  - 5.请避免硬物将其划伤以至影响使用效果。
  - 6.凡是购买本产品的买家请根据灯背后电池座配用电池。
  - 7.使用产品时，请详细阅读说明书。
- 1.Make sure the power is off after use.
  - 2.Do NOT plug/unplug when the power is still connected.
  - 3.Since there can be high voltage inside the unit, Do NOT open or repair the unit yourself. If there is any defect, please contact an experienced technician.
  - 4.Keep the environment dry and ventilated when using the product. Do not leave or use the flash in humid or dusty environment.
  - 5.For best performance of LEDs, maintain cleanliness of LEDS by wiping the surface softly with clean cloth.
  - 6.Do NOT apply pressure to the product.
  - 7.Only use the specific Li-ion camcorder batteries according to the model of the battery holder on the rear panel
  - 8.Read this manual carefully before using the product.

- |                        |                               |                                   |
|------------------------|-------------------------------|-----------------------------------|
| 1.LED灯泡 LED light bulb | 7.显示屏 Display                 | 13.电源插座 Power socket              |
| 2.标准罩 Reflector        | 8.主菜单 Menu button             | 14.亮度显示 Dimming display           |
| 3.锁紧把手 Handle lock     | 9.确认键 Enter button            | 15.色温显示 Color temperature display |
| 4.灯罩锁钮 Reflector lock  | 10.向上，向下调节按钮 Up & down button | 16.特效 Special effect              |
| 5.灯体 Light body        | 11.电源开关 Power switch          | 17.特效速度 Special effects speed     |
| 6.U架 U-bracket         | 12.把手 Handle                  | 18.特效亮度 Special effect dimming    |

## C) 操作说明 Operating Instructions

### I 、LED灯使用 LED lighting operation

- 1.打开电源开关后,液晶屏显示如图1, 按“Enter”确认键, 选中亮度显示, 再按向上或向下键调节灯具的亮度。
  - 2.按“Menu”主菜单键后液晶屏显示如图2, 按“Enter”确认键选中特效功能, 再按向上或向下键选择灯具已预的设特效功能模式。
  - 3.如图2, 按两次“Enter”确认键选中特效速度功能位置, 再按向上或向下键调节灯具特效功能的闪烁速度。
  - 4.如图2, 按三次“Enter”确认键选中特效亮度功能位置, 再按向上或向下键调节灯具特效功能的亮度。
  - 5.按两次“Menu”主菜单键后液晶屏显示如图3, 按“Enter”确认键选中频道, 再按向上或向下键调节灯具的频道。
  - 6.如图4, 按两次“Enter”确认键选中风扇显示, 再按向上或向下键开关灯具的风扇。
- 1.After you turn on the light, the display will show the screen as fig.1. Press Enter button to select the dimming and then press up & down button to adjust the dimming.
  - 2.Press the Menu button to fig.2. Press Enter button to select the special effects and then press up & down button to adjust the special effects.
  - 3.Fig.2, press Enter button twice to select the speed and press up & down button to adjust the speed for the special effects.
  - 4.Fig.2, press Enter button three times to select the special effect dimming and press up & down button to adjust the dimming of special effects.
  - 5.Press Menu button twice to fig.3 . Press Enter button and select DMX channel, adjust the channel by up& down button.
  - 6.Fig.3, press Enter button twice to select the “Fan” and press the up & down button to on/off the fan.



Figure 1



Figure 2



Figure 3



Figure 4

## II、灯光无线控制APP Lighting Remote Control APP



# DESAL Lite



IOS


搜索“DESAL Lite”下载安装  
Search "DESAL Lite" on APP Store  
to download



Android

请手机浏览器扫描二维码下载安装  
Use your scan tool scan the QR code  
to download

## APP connected lamps APP连接灯具

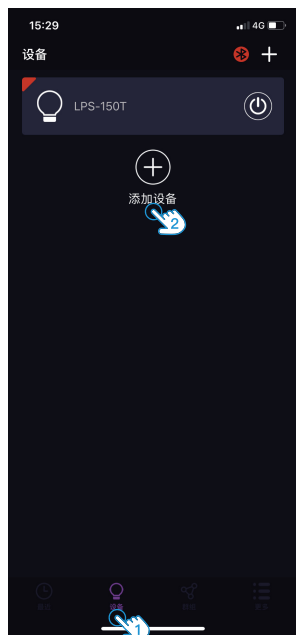

打开灯具, 打开手机蓝牙, 打开“DESAL Lite”app  
Turn on the device, turn on Bluetooth of the phone, and open the “DESAL Lite” app



1 导航栏选择“设备”  
Select “Device” in the navigation bar




2 点击“添加设备”  
click “Add Device”



3 自动扫描到可连接灯具, 点击扫描到的灯具右侧 ⊕ 连接  
Automatically scan devices, click on the right side of the scanned device ⊕ connect

★ 如 APP 未找到需连接的灯具, 请重置灯具的蓝牙连接。

If the APP does not find the lamp to be connected, please reset the Bluetooth connection of the lamp.

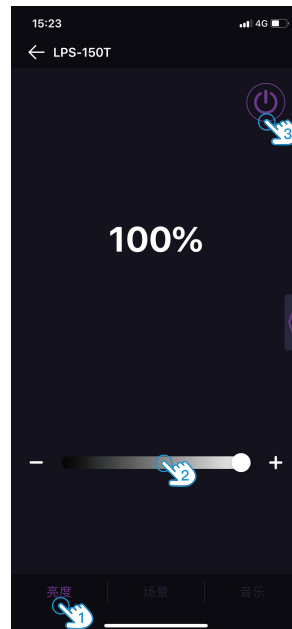

## Brightness control 亮度控制

在“最近”、“设备”、“群组”页选择需要使用的设备或群组  
Select the device or group to be used on the “Recent”, “Device” and “Group” pages



1 导航栏选择“亮度”进入亮度控制页  
Select “Brightness” in the navigation bar to enter the brightness control page



2 点击或滑动亮度控制条调节灯光亮度  
Click or slide the brightness control bar to adjust the brightness



3 点击打开 / 关闭灯光  
Click to turn on/off the light



## Light Scene Effect 灯光场景特效

在“最近”、“设备”、“群组”页选择需要使用的设备或群组  
Select the device or group to be used on the “Recent”, “Device” and “Group” pages



1 导航栏选择“场景”进入亮度控制页  
Select “Scene” in the navigation bar to enter the brightness control page



2 点击或滑动亮度控制条调节灯光亮度  
Click or slide the brightness control bar to adjust the brightness



3 点击速度控制条调节灯光变化速度  
Click the speed control bar to adjust the speed of light changes



4 点选灯光特效  
Click on lighting scene effects



5 点击打开 / 关闭灯光  
Click to turn on/off the light

★ APP 仅能控制关闭灯光亮度, 灯具电源开关需在机身控制  
APP can only turn off the light, switching off the lamp will need to turn off physically on the power switch.

## A) 产品概述 Product Overview

DSL-200T是锐鹰新开发一款COB灯珠的LED补光灯，标准保荣接口，与各种保荣灯光配件通用，功率200W，色温5600K，无极调光，内置9种场景模式：闪电一、闪电二，电视、烛光、狗仔队、频闪、远近灯光、双闪、呼吸灯，LED液晶显示，一米照度达到23000 lux，适合于在线直播、人像拍摄、儿童拍摄、产品视频拍摄等场景应用，体积小、亮度高、色温准、多特效是它的优点。

DSL-200T is the new developed LED light with COB light bulb from Falcon Eyes. It is equipped with Bowens mount which is able to work with different Bowens accessories. The light is 200W, single color 5600K, 0-100 dimming and nine preset special effects including 2 Lighting pattern, TV, Candle light, Paparazzi, flash, distance light, double flash, breathing and screen. This is a light with high lux, this will be a great solution video and photography production.

## B) 功能示意图 Panel Diagram

